440
NON INSULATED

441
INSULATED

doorLink
Manufacturing, Inc.®

24 GAUGE

LONG GROOVED PANEL

440

441

PAINT
1.0
MIL

PAINT	EFFICIENCY
1.0	**6.85**
MIL	R-VALUE

INTERIOR
VINYL
SKIN

Constructed of top quality materials, highly detailed grooved panel, deep pebble grain texture and two coat prefinished paint system all combine to enhance the beauty of your home.

440/441 STANDARD FEATURES

24 GAUGE METAL
Hot dipped galvanized steel construction with hemmed inside return rail provides superior strength and durability.

1.0 MIL PAINT SYSTEM
Includes .25 mil rust inhibiting primer and .75 mil exterior top coat that resists fading and chalking while providing consistent color from panel to panel, and long life.

ROLLED SAFETY EDGES ON SECTION JOINTS
Eliminates sharp edges, and provides extra strength.

19 GAUGE HOT DIPPED GALVANIZED STILES
Heavy duty metal styles give strong rigid support for all hinges, rollers and operator attachment.

STILES ATTACHED WITH RIVETS
Provides superior strength when compared to common sheet metal joining methods.

TONGUE AND GROOVE MEETING RAILS
For superior strength and better sealing against wind, rain and snow.

RIGID ALUMINUM RETAINER
Provides added strength while securing replaceable u-shaped bottom weatherstrip to help keep the elements out.

441 ADDITIONAL FEATURES

R VALUE 6.85 INSULATION
Enhances your home's energy savings, makes your door operation quieter, and reduces exterior noise in your garage.

CFC FREE EXPANDED POLYSTYRENE
Environmentally friendly insulation that will not degrade with vibration or time.

HIGH IMPACT PLASTIC BACK COVER
Protects the insulation, and enhances the interior look of your garage door.

COLORS
Brochure color may vary from actual product.

- WHITE
- BROWN
- ALMOND
- GRAY
- DESERT TAN
- WALNUT
- BLACK
- DRIFTWOOD
- SANDSTONE

AVAILABLE WINDOWS

#287 STOCKTON ARCH

#388 SOMERTON

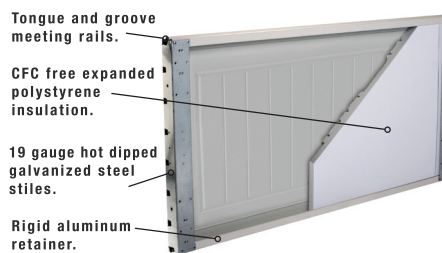#387 STOCKTON

#588 WYNDBRIDGE

#587 STOCKBRIDGE

#897 PRAIRIE

NOT ALL GLAZING OPTIONS MAY BE AVAILABLE FROM ALL DISTRIBUTORS.
NO GLAZING ON 18" SECTIONS.
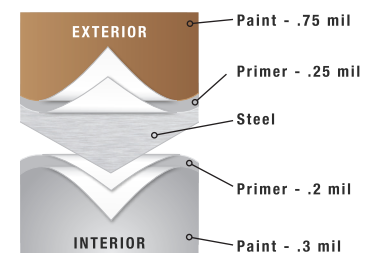NOT ALL WINDOW INSERTS ALIGN WITH PANEL STAMP DESIGN.

SIZES AVAILABLE

DOOR WIDTH	PANELS WIDE	HEIGHTS AVAILABLE: 6'6" 6'9" 7'0" 7'6" 7'9" 8'0"
8', 9', 10'		
12', 14'		
15', 16', 17', 18'		
20', 22'		

CONSTRUCTION

Tongue and groove meeting rails.

CFC free expanded polystyrene insulation.

19 gauge hot dipped galvanized steel stiles.

Rigid aluminum retainer.

PAINT LAYERS

EXTERIOR
- Paint – .75 mil
- Primer – .25 mil
- Steel

INTERIOR
- Primer – .2 mil
- Paint – .3 mil

Your Local Authorized Dealer:

To view this product online:

doorLink Manufacturing, Inc.®

IDA International Door Association

DASMA